Technical Report Documentation Page

1. REPORT No.
CA-DOT-TL-5149-1-76-55

2. GOVERNMENT ACCESSION No.

3. RECIPIENT'S CATALOG No.

4. TITLE AND SUBTITLE
Cement Content Of Fresh Concrete

5. REPORT DATE
September 1976

6. PERFORMING ORGANIZATION

7. AUTHOR(S)
J.H. Woodstrom and B.F. Neal

8. PERFORMING ORGANIZATION REPORT No.
19303-635149C

9. PERFORMING ORGANIZATION NAME AND ADDRESS
Office of Transportation Laboratory
California Department of Transportation
Sacramento, California 95819

10. WORK UNIT No.

11. CONTRACT OR GRANT No.
F-4-13 (6)

13. TYPE OF REPORT & PERIOD COVERED
Final 1967-76

12. SPONSORING AGENCY NAME AND ADDRESS
California Department of Transportation
Sacramento, California 95807

14. SPONSORING AGENCY CODE

15. SUPPLEMENTARY NOTES
This project was performed in cooperation with the U.S. Department of Transportation, Federal Highway Administration under "Concrete Test Methods and Specifications".

16. ABSTRACT
A test method for determining the cement content of fresh concrete was developed for both laboratory and field use. Using hydrochloric acid to keep a concrete mixture constantly neutralized, the cement content can be determined to within about 1/4 sack per cubic yard.

Field tests indicate the method is most useful in evaluating the performance of a concrete mixer. Relative cement contents of various portions of a batch can be determined in about one hour. Adjustments to aggregate and/or cement feed can then be made as needed to improve mixing uniformity.

17. KEYWORDS
Cement content, concrete mixes, mixing efficiency, test methods.

18. No. OF PAGES:
38

19. DRI WEBSITE LINK
http://www.dot.ca.gov/hq/research/researchreports/1976-1977/76-55.pdf

20. FILE NAME
76-55.pdf

This page was created to provide searchable keywords and abstract text for older scanned research reports.
November 2005, Division of Research and Innovation

DIVISION OF STRUCTURES AND ENGINEERING SERVICES

TRANSPORTATION LABORATORY

RESEARCH REPORT

Cement Content of Fresh Concrete

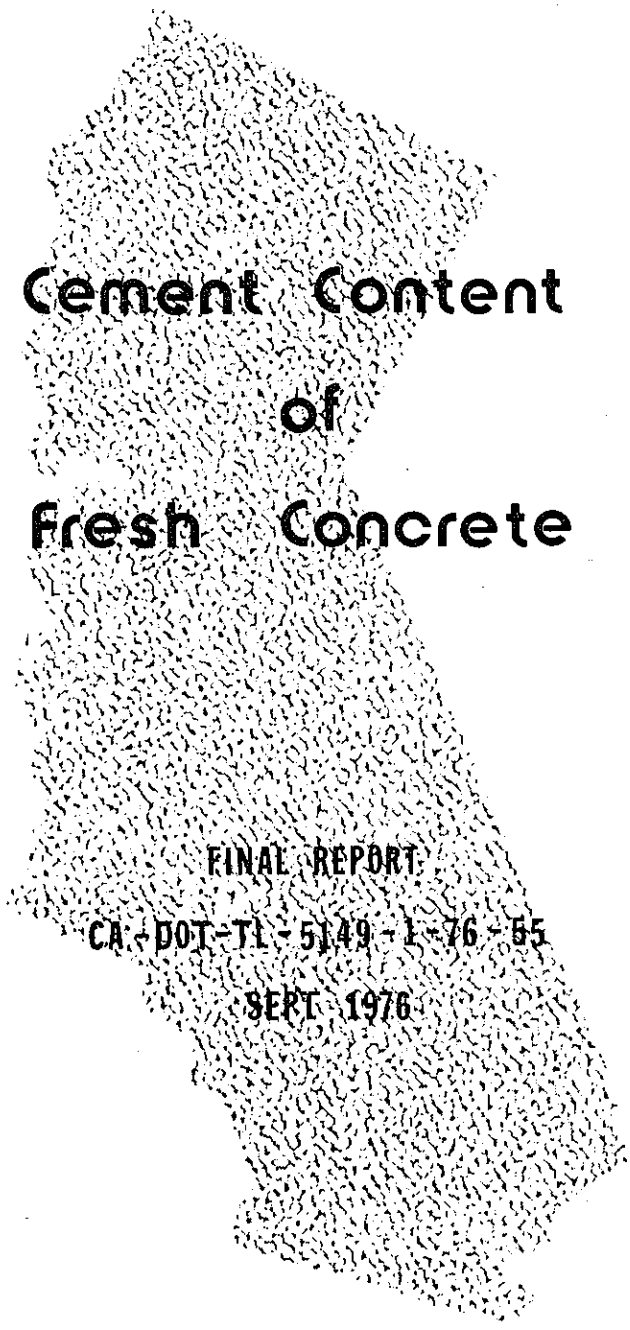

FINAL REPORT

CA-DOT-TL-5149-1-76-65

SEPT 1976

Prepared in Cooperation with the U.S. Department of Transportation,

Federal Highway Administration

Caltrans

CALIFORNIA DEPARTMENT OF TRANSPORTATION

ClibPDF - www.fastio.com

ClibPDF - www.fastio.com

TECHNICAL REPORT STANDARD TITLE PAGE

1. REPORT NO.	2. GOVERNMENT ACCESSION NO.	3. RECIPIENT'S CATALOG NO
CA-DOT-TL-5149-1-76-55		

4. TITLE AND SUBTITLE	5. REPORT DATE
CEMENT CONTENT OF FRESH CONCRETE	September 1976
	6. PERFORMING ORGANIZATION CODE

7. AUTHOR(S)	8. PERFORMING ORGANIZATION REPORT NO.
J. H. Woodstrom and B. F. Neal	19303-635149C

9. PERFORMING ORGANIZATION NAME AND ADDRESS	10. WORK UNIT NO.
Office of Transportation Laboratory California Department of Transportation Sacramento, California 95819	11. CONTRACT OR GRANT NO F-4-13(6)

12. SPONSORING AGENCY NAME AND ADDRESS	13. TYPE OF REPORT & PERIOD COVERED
California Department of Transportation Sacramento, California 95807	Final 1967-76
	14. SPONSORING AGENCY CODE

15. SUPPLEMENTARY NOTES

This project was performed in cooperation with the U.S. Department of Transportation, Federal Highway Administration under "Concrete Test Methods and Specifications".

16. ABSTRACT

A test method for determining the cement content of fresh concrete was developed for both laboratory and field use. Using hydrochloric acid to keep a concrete mixture constantly neutralized, the cement content can be determined to within about 1/4 sack per cubic yard.

Field tests indicate the method is most useful in evaluating the performance of a concrete mixer. Relative cement contents of various portions of a batch can be determined in about one hour. Adjustments to aggregate and/or cement feed can then be made as needed to improve mixing uniformity.

17. KEY WORDS	18. DISTRIBUTION STATEMENT
Cement content, concrete mixes, mixing efficiency, test methods.	No restrictions. This document is available to the public through the National Technical Information Service, Springfield, VA 22161.

19. SECURITY CLASSIF. (OF THIS REPORT)	20. SECURITY CLASSIF. (OF THIS PAGE)	21. NO. OF PAGES	22. PRICE
Unclassified	Unclassified	38	

DH-TL 1242 (Rev. 3-74)

ClibPDF - www.fastio.com

ClibPDF - www.fastio.com

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
DIVISION OF STRUCTURES & ENGINEERING SERVICES
OFFICE OF TRANSPORTATION LABORATORY

September 1976

FHWA No. F-4-13(6)
TL No. 635149C

Mr. C. E. Forbes
Chief Engineer

Dear Sir:

I have approved and now submit for your information this final research project report titled:

CEMENT CONTENT OF FRESH CONCRETE

Study made by . . . . . Roadbed & Concrete Branch

Under the Supervision of . . . . . D. L. Spellman

Principal Investigator . . . . . J. H. Woodstrom

Co-Investigator . . . . . S. N. Bailey

Report Prepared by . . . . . J. H. Woodstrom

Assisted by . . . . . B. F. Neal

Very truly yours,

George A. Hill

GEORGE A. HILL
Chief, Office of Transportation Laboratory

Attachment

BFN:lb

ClibPDF - www.fastio.com

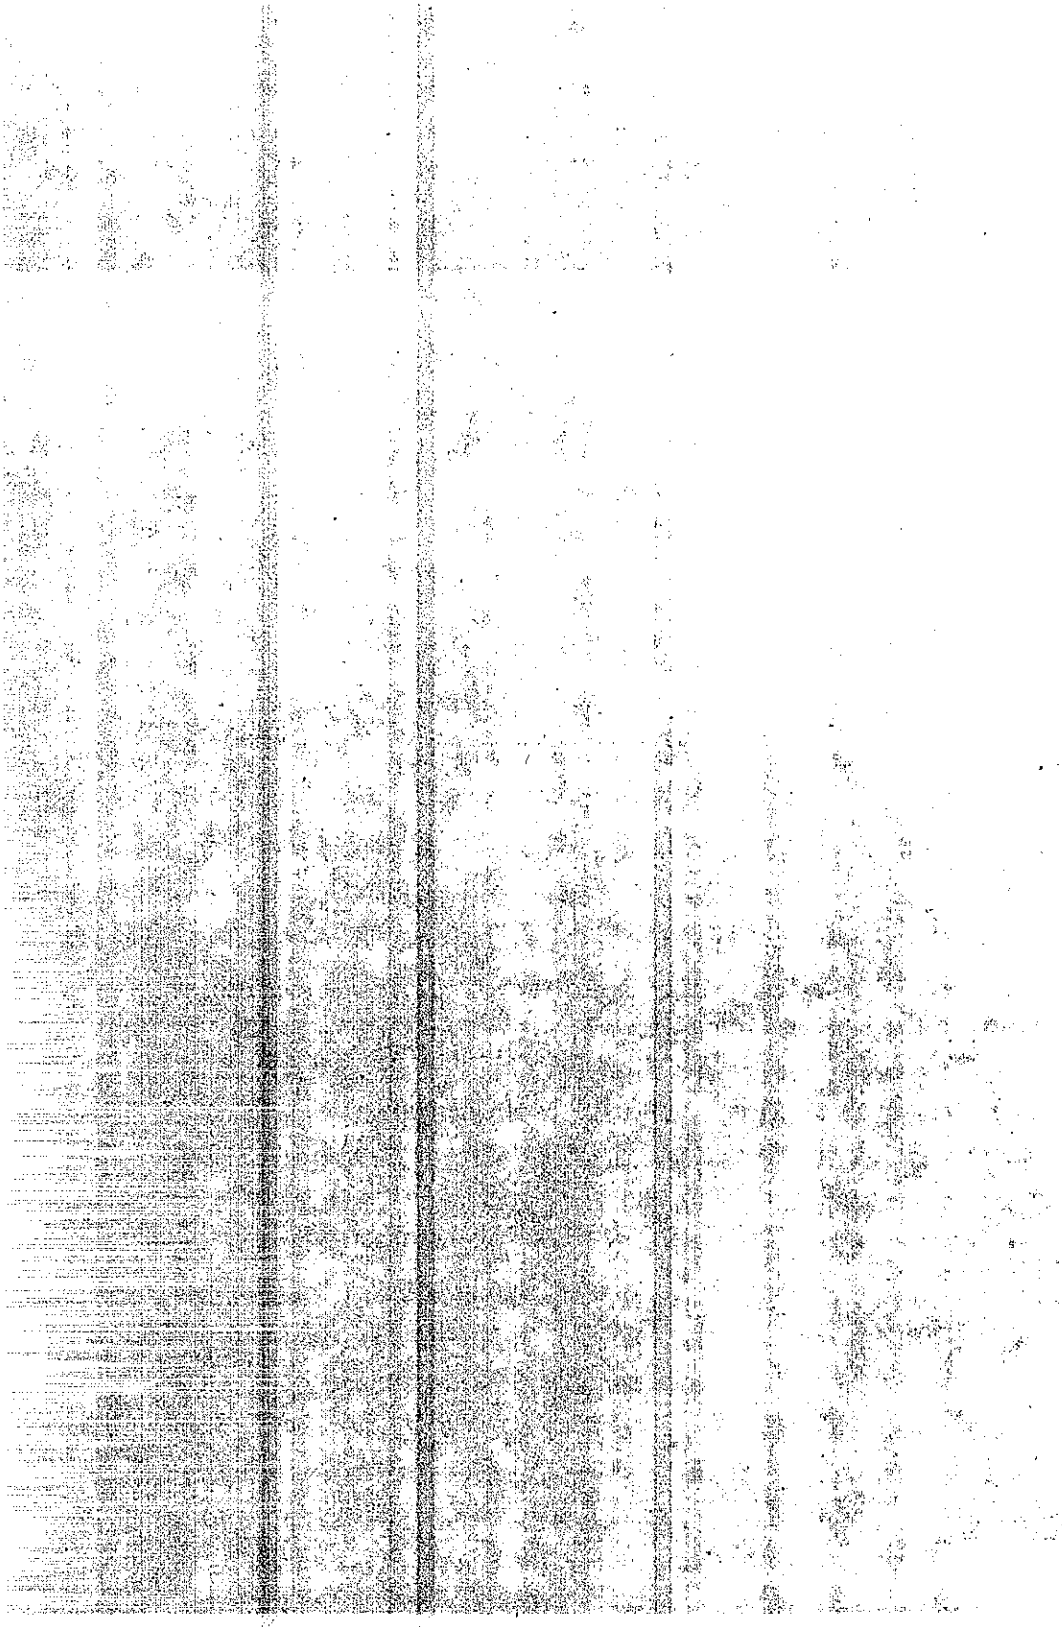

ClibPDF - www.fastio.com

ACKNOWLEDGMENTS

The contents of this report reflect the views of the Transportation Laboratory which is responsible for the facts and the accuracy of the data presented herein. The contents do not necessarily reflect the official views or policies of the State of California, or the Federal Highway Administration. This report does not constitute a standard, specification, or regulation.

ClibPDF - www.fastio.com

ClibPDF - www.fastio.com

TABLE OF CONTENTS

	Page
INTRODUCTION	1
CONCLUSIONS	2
IMPLEMENTATION	3
LABORATORY WORK	4
FIELD IMPLEMENTATION	10
DISCUSSION	20
SUMMARY	23
TABLES	
Table 1	7
2	8
3	9
4	15
5	17
6	18
FIGURES	
Figure 1	21
APPENDIX A - TEST METHOD	A-1

ClibPDF - www.fastio.com

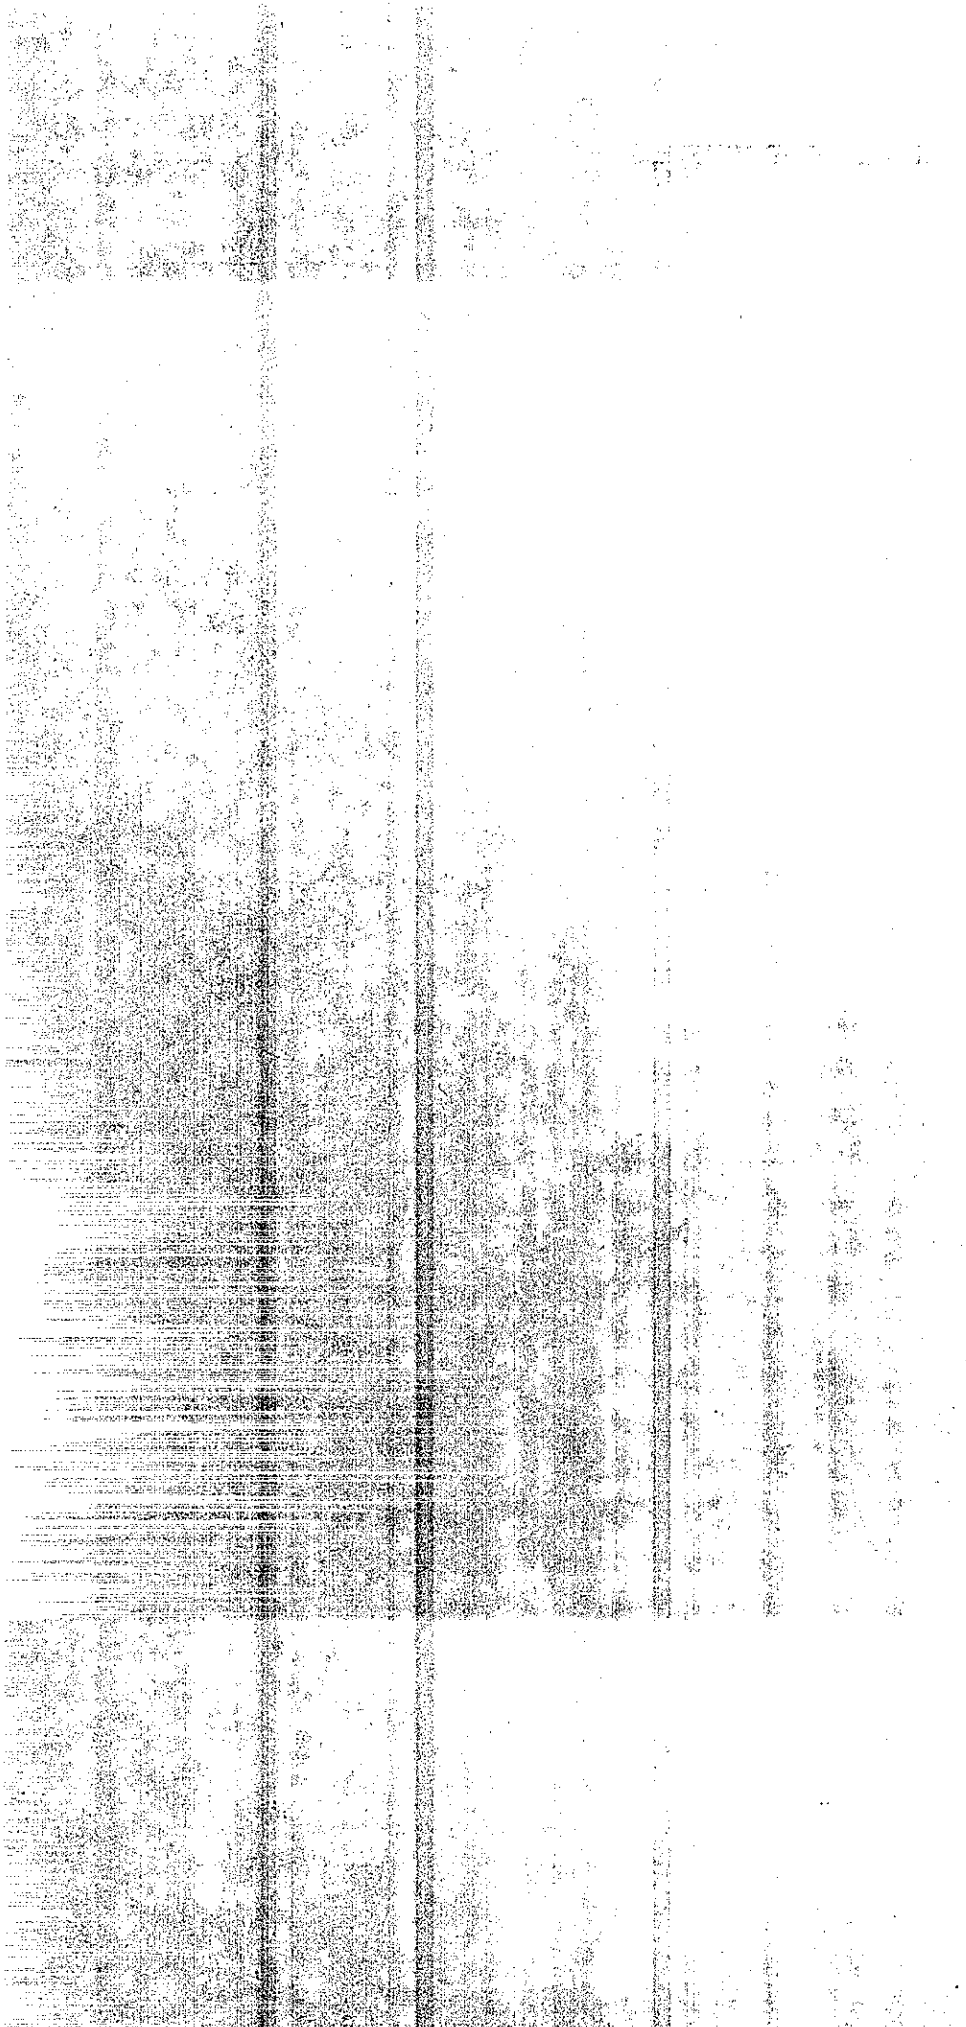

ClibPDF - www.fastio.com

INTRODUCTION

The evaluation of adequately mixed concrete has been of concern to those involved in concrete work ever since concrete became a major structural element in a wide variety of facilities. In spite of vast technological changes in concrete plant design, mixing equipment and in improved specifications, the engineer cannot always safely assume that he has uniformly mixed concrete from one end of the mixer discharge to the other. The variations that occur, probably more often than we realize, are difficult to detect.

Mixer performance studies have proven to be valuable aids in determining the significant factors affecting concrete uniformity. Test programs are generally quite costly to run, require special sampling equipment, and take a considerable length of time for analysis because of the need for strength tests. There has been a notable deficiency in mixer performance tests because of the inability to determine the cement content of a sample of concrete in a short period of time under field conditions. Since a variation in cement content is the most significant factor affecting concrete quality, the need for its determination is of prime importance. Of considerably less significance are the more usual field measures used such as comparing slump or penetration, the amount of coarse aggregate per cubic foot of conctete, and unit weight. A large variation in cement content may have a relatively small effect on the tests mentioned above. Since other factors may also cause test variations, the conventional tests provide no early indication of cement imbalance. Thus, the development of a rapid test for determing cement content would provide the capability of providing adequate job control of freshly mixed concrete by testing for the most critical ingredient with respect to concrete quality.

ClibPDF - www.fastio.com

CONCLUSIONS

Based on the laboratory and field tests reported here, the following conclusions are considered warranted.

1. The constant neutralization test is a fast and reasonably accurate method of determining cement content. Time required is 1 hour after beginning test. From the limited laboraotry tests, accuracy appears to be within about 1/4 sack of cement per cubic yard.

2. A control must be established before determining cement content of project samples. A new control curve must be established if there is any change in cement or aggregate source.

3. At present, the most applicable use of the method is to test mixer efficiency. Test show that imbalances of any of the concrete ingredients during the mixer charging sequence can affect cement distribution within the batch. The test method can be used to determine within batch variations of cement distribution and thus provide information to aid in correcting the charging sequence.

4. The test was not proven to be of sufficient accuracy for routine control of cement content during normal concrete production.

ClibPDF - www.fastio.com

IMPLEMENTATION

The test method developed during this research is not intended for use in a routine manner in the production of concrete. Personnel costs in conducting a test program would normally be considered high and specialized training is required. Sampling may require special equipment and delays in production. The uniformity of cement distribution is normally adequate.

Specifications could be written to include limits as to the variation in cement content as determined by the titration test. Invocation of the requirements would be at the discretion of the Engineer and would be triggered by any of several factors indicative of the possible production of nonuniform concrete. These would include, but not be limited to: (1) visual observations (2) within batch variations of slump, unit weight, or strength (3) nonuniform batching techniques (4) use of new batching or mixing equipment (5) indications of plant malfunction (6) historical knowledge of plant equipment.

ClibPDF - www.fastio.com

LABORATORY WORK

In an effort to find a rapid, simple test to determine the cement content of a sample of fresh concrete, initial efforts were directed at the possibility of using straightforward physical tests. These include the following:

Wash-Out Method

This approach involves washing a sample of concrete through a 100 or 200 mesh sieve. Larger sieves are incorporated to prevent overloading and damage to the fine screens. The solid material passing the fine sieve will consist essentially of 100% of the cement plus the initial aggregate fines and any fines generated in the mixing process. Mixing water is also "lost" in this process. The total saturated surface dry weight of retained aggregate is subtracted from the initial weight of the concrete sample, the remainder being the total of the lost material; cement, aggregate fines and mixing water. If it can be assumed that the amounts of mixing water and aggregate fines are reasonably uniform throughout a batch of concrete, a fairly close indication of the uniformity of cement distribution can be obtained.

The washout approach has been used with reasonable success under certain conditions and an attempt was made to develop a rapid washing facility. An apparatus was constructed consisting of a large funnel in which a sample of fresh concrete was placed. Water under pressure was introduced from the bottom and the velocity and turbulence of the diluted concrete separated the fines from coarser aggregate particles. The fines were carried away through an overflow which was run across a 100 mesh sieve.

Both the equipment and the premise of the testing approach had weaknesses. The concrete samples in various portions of a

ClibPDF - www.fastio.com

batch were found to be subject to imbalances which affected the indicated cement content. The test apparatus as designed was somewhat unwieldy and required constant attention to assure complete segregation of the fines. It was decided that it was unlikely that this approach could be developed to the point where adequate accuracy could be achieved for field testing.

Heavy Media Method

An effort was made to separate cement from mortar using a heavy liquid tetrabromoethane solution with vibration in an ultrasonic bath. Specific gravities of sand, tetrobromoethane and cement are approximately 2.65, 2.95 and 3.15, respectively.

Samples of wet concrete mortar mixed with tetrabromoethane were placed in polyethylene or glass centrifuge tubes. The tubes were then placed in water in the ultrasonic bath and vibration activated. Separation of sand and cement was unsatisfactory. Variations of the test procedure were tried, such as centrifuging the samples prior to placing in the ultrasonic bath, but none improved the test to a satisfactory degree. It was concluded that:

1. Cement is apparently too fine to be moved by gravity through the heavy liquid.

2. The attraction between cement and sand, when in a wet state, is too great for separation by ultrasonic vibration.

Attempts to develop this method further were abandoned.

ClibPDF - www.fastio.com

Constant Neutralization Method

Test Method No. Calif. 338, "Determination of Cement or Lime Content in Treated Aggregate by the Titration Method", has been used successfully in California for a number of years. This method is based on the theory that the concentration of hydroxide ions, liberated during the hydration process, is directly proportional to the amount of cement in an aggregate-cement mixture. By making a solution of the mixture, water and phenolphthalein indicator, hydrochloric acid can be constantly added to combine hydrogen ions with the hydroxide ions and keep the solution neutral. By measuring the amount of acid added over a standard period of time, the cement content can be determined.

The test method was developed basically for the purpose of checking the cement content of cement treated bases. These are lean mixtures, normally ranging from 3 - 5% cement by weight of the dry aggregate. Early trials with richer mixtures were disappointing because of rather large variations in the results. After considerable experimentation it was found that with certain modifications results could be obtained which were considered satisfactory. The primary change was to use only that portion of a mix passing the No. 4 sieve. Another change was to increase the amount of water added to a 150 gram sample from 400 to 1000 milliliters. The additional water makes color changes more definite and appeared to increase the accuracy of results. The test method as revised for use with concrete can be found in the appendix.

Many of the early tests were on concrete mixed by hand in small batches. A comparison between batches mixed by hand and those mixed by machine (pan type) indicated more consistent results were obtained from the machine mixes. Hand mixes were satisfactory provided certain precautions were observed, such as:

ClibPDF - www.fastio.com

weighing materials accurately, stirring the mixture thoroughly, and taking care that no mortar was lost or left in the mixing pan. It was also found that for hand mixing, larger batches (20 pounds) gave better results than small batches (10 pounds). Tests on concrete mixed with a barrel mixer initially indicated less satisfactory results than obtained from the pan type machine mixes. Considerable improvement resulted from "buttering" the mixer or omitting washing of the drum between batches. Regardless of mixing method, the most important consideration in obtaining accurate results is the securing of a representative sample.

Laboratory tests were also made to determine the effect of varying cement or water with other ingredients held constant. In one case, three mixes were made in which aggregate weights and slump were held constant. The designed cement content was 6 sacks per cubic yard. One batch was mixed with cement added at that rate and in the other two, cement was varied plus and minus 10% from the designed factor. Table 1 shows the titration results for each mix.

TABLE 1

Batched Cement Content vs. Grams of Acid Used

Batched Cement Content, Sks./Cy.	Acid Added* Grams	Indicated Cement Content Sks./Cy.
5.4 (Designed -10%)	143.7	5.29
6.0 (Designed)	163.0	6.00
6.6 (Designed +10%)	177.7	6.54

*Average of three tests, using 150 gram mortar sample.

The results indicate an accuracy within 2% or, in this case, about 1/8-sack/cy.

ClibPDF - www.fastio.com

In another series of tests, aggregate and cement amounts were held constant and water varied to produce different slumps. Table 2 shows the results of these titration tests.

TABLE 2

Effect of Water-Cement Ratio on Titration Results

W/C Ratio	Slump, Inches	Acid Added,* Grams
0.32	1/4	247
0.34	3/4	245
0.36	1-1/4	240
0.38	2-1/4	235
0.41	4-3/4	237
0.43	5	236
0.45	8	229

*Average of three tests using 150 gram mortar sample.

The results indicate that within the normal working range of 1 to 5 inches slump, variations due to water are not likely to be large. However, any control mix for a project should be made in the slump range that is expected to be used.

In the laboratory, it is common practice to check yield and cement content by the test method described in ASTM Designation: C138. Table 3 shows results of titration tests on concrete with various cement contents as determined from the yield test. Aggregate and cement sources and slump were held constant.

ClibPDF - www.fastio.com

TABLE 3

Titration Results vs. Cement Content From Yield Test

Cement Content Sks./Cu. Yd.		Acid Added* Grams	Indicated Cement Content Sks./Cu. Yd.**
Design	Yield Test		
5.0	5.20	185.7	5.20
	5.10	176.7	4.95
	5.07	179.7	5.03
5.5	5.58	198.3	5.55
	5.46	196.3	5.50
	5.53	195.0	5.46
6.0	5.99	210.3	5.89
	6.04	219.7	6.15
	6.18	214.0	5.99

*Average of three tests.
**From first yield test - 185.7 grams = 5.20 sks.

These results also confirm that a good correlation exists between the amount of acid used for constant neutralization and the cement content of fresh concrete.

The test method was tried in the field on a few projects during concrete placements. The results indicated considerable variation in cement content between batches, but were inconclusive since results were not verified by other means. However, in 1971 an opportunity arose to make comprehensive testing possible in the field, some of which were under controlled conditions. The work is reported under the following section on implementation.

ClibPDF - www.fastio.com

FIELD IMPLEMENTATION

In 1971, a new concrete batching plant with twin 15-cubic yard mixers was used on a 17-mile paving project near Williams, California. At various locations serious defects were noted on the new pavement. Excessive cracking was evident and considerable raveling occurred when sawing weakened plane joints. Pavement cores taken in these areas showed the concrete to be deficient in cement. Wide variations in cement content were obvious within the confines of a single core in many cases. The problem was found to be related solely to nonuniform distribution of cement within a single batch of concrete.

When the source of the problem was determined, the contractor was notified that certain plant modifications were necessarry to assure proper batching. The contractor, in cooperation with the plant manufacturer, made these changes and on a subsequent paving project near Saugus, California, a special testing program was conducted to evaluate the mixing characteristics of the plant. The titration test proved to be a valuable tool in the test program that was conducted.

In the particular plant layout in question, the cement and water batching facilities are in a tower above the mixers. Cement is stored in an overhead silo, weighed, and then discharged directly into the mixing drum separately from the aggregate. Water is weighed and placed in an intermediate holding tank from which it is charged into the mixers. The aggregate is batched in a low profile portable weigh batcher, then a belt elevates it to the mouth of the mixing drums. Charging of the mixer is carried out in a pretimed sequence in order to blend aggregate, cement, and water. About 7 seconds is required for the aggregate to travel from the belt below the weigh batcher to the mixer

ClibPDF - www.fastio.com

drums. At time zero, (arbitrary) the first aggregate gate opened, starting the sand feed. In sequence, the other two aggregate bin gates opened, layering these aggregates onto the sand. Cement and water are gravity fed from overhead directly into the mixer in timed sequence. The normal time of the operation in seconds is as follows:

	Time to Empty Hopper	Gate Delay	Time on Belt	Total Time for All Material to be in Drum
Sand	27	0	7	34
#2 Aggregate	25	1	7	33
#3 Aggregate	24	2	7	33
Cement	21	9	0	30
Water	(Not timed)			

The gate on the cement hopper is activated by a step switch that opens it at a predetermined moment. When operating in the proper manner the step switch gate arrangement controls the rate of cement discharge so that it more or less corresponds in proper proportion to the time taken for the aggregate to be charged. At Williams there was some evidence that the cement hopper either opened early, before the aggregate reached the mixing drums, or it did not "step" properly, opening all the way, or nearly so, thereby putting most of the cement in as a slug which was not subsequently distributed inside the mixer. Corrective modifications made to the plant included installation of a visual and audible warning system which would indicate whether or not the cement was discharged at a controlled rate from the time discharge gate opened until no more than about 200 pounds of cement remained in the hopper. Criteria suggested for the rate of cement feed for normal operation was as follows:

ClibPDF - www.fastio.com

Percent of Aggregate Charging Cycle Time	Percent of Cement to be in Mixer
25	15-35
50	40-60
75	65-85
110	100

In order to evaluate mixing characteristics, two series of tests were performed. Test Series One was conducted on December 21, 1971, and January 5 and 6, 1972, at Saugus. The purpose of the test program was to determine the effects of controlled imbalance of cement on the uniformity of concrete as well as to evaluate normal production. A tabulation of test data is shown on Tables 4 and 5.

Samples of concrete were obtained by stopping the mixer and physically entering it with sample containers and shovels. The "front" of the drum is that portion from where the concrete is discharged.

Details of plant operation and comments on batching procedures and test results for Test Series I follows:

February 21, 1971

Batch No. 1

North mixer intended to be normal operation. Step switch on the cement gate set to provide a charging period of 26 seconds, commencing 1-1/2 seconds after opening of first aggregate gate. The water valve was found to be set incorrectly, allowing a higher concentration of water near the rear of the mixer at the end of 50 seconds mixing. The wide dispersion of test results was somewhat alleviated by mixing an additional 20 seconds. (Batch 1a)

ClibPDF - www.fastio.com

Batch No. 2
Intended to check North mixer under normal operation. Even though a slow delivery of the No. 2 rock was observed, test results indicate adequately mixed concrete. Additional 20 seconds of mixing had little effect on uniformity. (Batch 2a)

Batch No. 3
To check South mixer under normal operation. Adequate mixing apparent. Additional 20 seconds of mixing had little effect on uniformity. (Batch 3a)

Batch No. 4
To check normal operation of North mixer. Mixing adequate.

January 5 and 6, 1971

Batch No. 5
To check normal operation of South mixer. Cement feed found to require total of 37 seconds which may account for higher strength of concrete from rear of drum. Titration test did not differentiate cement concentration. Water and mortar spilled from front of mixer during mixing cycle.

Batch No. 6 - North Mixer
Cement concentrated near front of mixer as indicated by all test parameters. Additional mixing of 70 seconds did not provide concrete of satisfactory uniformity. (Batch 6a)

Batch No. 7 - South Mixer
Similar results as in Batch No. 6.

Batch No. 8 - South Mixer
Cement charged in first part of batch, 300 seconds provided adequate mixing.

ClibPDF - www.fastio.com

Batch No. 9 - North Mixer
Similar to Batch No. 8.

Batch No. 10 - South Mixer
Slow feed of water (62 seconds) caused wide variation of test results between front and rear of mixer.

Batch No. 11 - South Mixer
Slow feed of water (62 seconds) again observed. Titration test indicates disparity in cement distribution, other tests indicate adequate uniformity. A sample can lid was found in the feed valve to the south mixer slowing flow of water.

Batch No. 12 - North Mixer
Normal operation and adequate uniformity.

Batch No. 13 - South Mixer
Normal operation. Grout lost from front of mixer may have affected test results.

Batch No. 14 - North Mixer
Shortened cement feed and adequate mixing.

Batch No. 15 - South Mixer
Shortened cement feed (21 seconds) and adequate mixing.

Batches Nos. 16 through 29
All batches sampled during production under normal operation. Adequate mixing in all batches except Batch No. 22.

Production Testing, February and March 1976
Test Series 2 was conducted during actual paving operation and tests were performed by job personnel. Results are shown in Table 6 and indicate that adequately mixed concrete was produced.

ClibPDF - www.fastio.com

ClibPDF - www.fastio.com

TABLE 4
TEST SERIES I
SAUGUS TEST DATA SUMMARY
CONTROLLED CEMENT IMBALANCE

Batch Number & Location		Mixing Time, Secs.	Mixer	Pen., Ins.	Slump, Ins.	Air %	Unit Wt. Lbs./CF	Coarse Aggr. Lbs./CF	Cement Content Sks/CY (Titration)*	Compressive Strength, psi 7-day Mortar Strength**	Cylinders* 7 days	Cylinders* 28 days
1	Front	50	North	1/4	3/4	2.7	155.3	68.0	6.1	5830	3490	4925
	Middle			1	1-3/4	2.2	156.0	64.0			2795	4595
	Rear			1-1/2	4-1/4	1.4	155.4	78.9	5.2	3065	1875	3595
1a	Front	50 +	North	1	1-3/4	2.2	149.9	67.9	6.2	4645	3115	4535
	Middle	20		7/8	1-5/8	2.1	155.6	72.0			2850	4545
	Rear			1-1/2	3-3/4	1.7	154.5	73.2	5.3	3400	2290	3925
2	Front	50	North	1	2-1/4	3.8	152.5	77.1	5.6	3830	2520	4340
	Middle			3/4	1-7/8	3.7	153.8	73.2			2610	4410
	Rear			3/4	2-1/8	3.4	154.5	73.0	6.0	4120	2695	4450
2a	Front	50	North	1-1/2	3-5/8	3.9	152.5	70.1	5.7	3540	2455	4190
	Middle	+		1-1/4	1-7/8	3.6	154.0	73.4			2600	4405
	Rear	20		1	2-1/4	3.4	154.6	75.1	5.9	3815	2645	4165
3	Front	50	South	5/8	2-1/4	1.7	155.0	70.2	5.4	4065	2580	4570
	Middle			1/4	1	1.8	155.9	72.5		5055	2855	4915
	Rear			3/8	1-3/8	2.1	155.2	67.8	5.5	4910	2980	4730
3a	Front	50	South	1	2-1/4	1.4	155.4	70.5	5.4	3940	2750	4535
	Middle	+		7/8	1-7/8	1.8	155.6	70.5			2860	4710
	Rear	20		5/8	1-1/2	1.8	155.2	68.4		4590	3050	4845
4	Front		North	1-1/8	2-1/4	3.5	153.4	72.5	5.7	4070	2510	4200
	Middle			1-1/8	2-7/8	3.2	153.8	73.0	5.7	4050	2465	4095
	Rear			1-1/4	2-5/8	3.2	154.4	74.8	5.6	4425	2435	4205
5	Front	50	South	1	3	4.1	151.2	71.1	5.9	4910	2415	3780
	Middle			1	2-3/4	3.8	151.6	70.2	5.8	4810	2485	4155
	Rear			1	2-3/4	3.7	152.4	70.0	5.8	5500	2760	4365
6	Front	50	North	5/8	1	2.8	155.7	70.8	7.1	7620	3900	5485
	Middle			1-1/4	2-3/4	3.0	153.3	70.4	5.3	4070	2265	3570
	Rear			1-1/4	2-3/4	3.6	153.6	88.3	4.9	2900	1490	2810
6a	Front	50	North	3/4	1-5/8	2.5	155.5	70.1	6.3	6710	3550	5040
	Middle	+		1-5/8	2-7/8	3.0	153.6	75.9	5.5	5100	2565	3650
	Rear	70		1-5/8	3-1/2	3.9	151.9	77.7	4.9	3520	2280	3195

*Average of 2 tests
**Averate of 3 2"x2" cubes

ClibPDF - www.fastio.com

TABLE 4 - SAUGUS TEST DATA SUMMARY (Continued)

Batch Number & Location		Mixing Time, Secs.	Mixer	Pen., Ins.	Slump, Ins.	Air %	Unit Wt. Lbs./CF	Coarse Aggr. Lbs./CF	Cement Content Sks/CY (Titration)	Compressive Strength, psi 7-day Mortar Strength	Cylinders 7 days	Cylinders 28 days
7a	Front	50	South	5/8	2	2.8	155.4	74.0	6.9	4870	2995	4475
	Middle			1-7/8	4-3/4	3.0	152.9	68.8	6.4	2950	2550	4260
	Rear			3+	9+	2.4	154.2	85.1	4.7	2460	1415	2725
7b	Front	50	South	1-3/4	3-1/4	3.6	153.2	72.5	5.7	4720	3035	4615
	Middle	+		2-1/8	4	3.4	152.4	72.6	5.6	4310	2755	4460
	Rear	70		2-1/8	3-3/4	3.7	152.9	71.5	5.3	4300	2615	4315
8	Front	300	South	2-1/2	4-1/2	5.5	149.8	72.2	5.9		2440	3935
	Middle			1-3/4	4-1/2	4.7	150.5	74.4	5.9		2480	4055
	Rear			1-7/8	5-1/4	5.3	150.8	74.3	5.9		2395	4120
9	Front	300	North	2-1/4	4-1/2	5.1	150.0	72.2	6.2		2620	4245
	Middle			1-3/4	4-1/4	5.0	150.3	70.4	5.9		2595	4225
	Rear			1-5/8	3-3/4	4.7	150.7	73.7	5.8		2550	4280
10	Front	50	South	7/8	2-1/2	2.7	155.0	75.4	7.1		2480	3915
	Middle			7/8	4-1/4	2.9	153.3	73.0	6.1		2190	3715
	Rear			2-5/8	8-3/4	2.5	149.4	72.5	4.9		1480	2775
11	Front	50	South	1-1/8	2-1/4	3.5	154.0	74.3	3.0		2200	3760
	Middle			1-1/2	3-3/4	3.2	152.7	74.6	5.4		2265	3980
	Rear			1-5/8	4-1/4	2.5	152.0	75.4	6.5		2310	3935
12	Front	50	North	1-1/2	3-5/8	3.2	153.5	73.1	6.1		2360	4380
	Middle			1	1-7/8	2.9	155.0	76.0	6.2		2690	4605
	Rear			1	1-3/4	2.9	154.5	73.6	6.5		2670	4545
13	Front	50	South	1-5/8	4-1/4	3.4	153.4	75.8	5.6		2220	3960
	Middle			1-1/8	3-1/4	3.0	153.3	74.4	6.2		2520	4490
	Rear			1-1/8	3	3.0	153.3	73.5	6.2		2845	4740
14	Front	50	North	2-3/8	4-3/4	3.4	152.5	69.9	6.0		2320	4295
	Middle			2	5	2.9	153.5	76.1	5.9		1985	4015
	Rear			1-3/4	6	2.9	152.5	75.1	6.0		1955	3805
15	Front	50	South	2-1/2	4-1/2	3.2	149.5	71.3	5.6		2100	4120
	Middle			2-1/8	4-3/4	3.0	155.8	73.9	5.4		1945	3645
	Rear			2	5-1/2	3.0	150.7	76.9	5.1		1785	3785

ClibPDF - www.fastio.com

TABLE 5
TEST SERIES I
SAUGUS TEST DATA SUMMARY
NORMAL STAGING OF CEMENT

Batch Number & Location		Mixing Time, Secs.	Mixer	Pen., Ins.	Slump, Ins.	Air %	Unit Wt. Lbs./CF	Coarse Aggr. Lbs./CF	Cement Content Sks/CY (Titration)*	Compressive Strength, psi 7-day Mortar Strength**	Cylinders* 7 days	Cylinders* 28 days
16	Front	47	South	2-3/8	4-3/4	3.0	153.1		6.1	2710	1820	3840
	Middle			2	4	2.8	154.3		6.0	2480	1910	3730
	Rear			1-3/4	3-1/2	2.6	153.1		5.9	2360	1885	3960
18	Front	50	North	2-4/8	8-1/4	3.0	150.9		6.2	2420	1775	3670
	Middle			2-5/8	6-3/4	3.3	152.4		6.0	2410	1820	3580
	Rear			2-1/4	7-3/4	3.2	151.5		6.0	2400	1890	3865
19	Front	50	South	3-1/2	6-3/4	4.0	151.1		6.0	2480	1810	3820
	Middle			3-1/2	7-1/2	4.6	151.5		5.8	2385	1735	3600
	Rear			3-1/2	7	4.1	150.5		5.8	2200	1575	3650
20	Front	50	North	1-1/2	4-1/2	4.3	153.3		6.4	2825	2100	4210
	Middle			1-1/4	3	4.0	154.0		5.9	2550	1985	3890
	Rear			1	2-1/2	4.0	153.7		5.8	2410	2130	4060
21	Front	50	South	1-1/4	3-1/2	5.0	152.7		5.7	2360	1880	4175
	Middle			1	2-1/4	5.6	152.2		5.5	2530	1990	4245
	Rear			3/4	2-1/2	5.5	151.5		5.1	2345	1910	3935
22	Front	50	North	1-1/4	2-3/4	5.0	151.9		5.4		2150	3820
	Middle			3/4	2	4.8	152.6		5.0		2000	4050
	Rear			3/4	1-3/4	5.2	151.9		4.5		1740	3290
23	Front	50	South	1-1/2	3	2.8	155.0		5.7		2035	4255
	Middle			1	2-1/4	2.8	152.9		5.3		1970	4175
	Rear			3/4	1-1/2	3.1	152.9		4.9		1965	4210
25	Front	50	North	1-3/4	4-1/2	1.6	155.3		6.0		2245	4375
	Middle			1-1/2	3-1/2	1.6	156.4		5.8		2220	4335
	Rear			1-1/8	3-1/2	2.0	157.9		5.6		2415	4510
26	Front	50	South	3	8	6.0	152.8		5.2		1720	3495
	Middle			3	8	5.2	152.3		5.3		1650	3440
	Rear			2-3/4	5-3/4	5.3	150.8		5.4		1590	3465
27	Front	50	North	1-3/4	4	5.2	154.0		6.3		2245	3855
	Middle			1-1/4	2-1/2	5.1	154.1		6.2		2090	3625
	Rear			1-1/4	2-1/4	4.8	153.1		6.0		2140	3720
28	Front	50	South	2	3-3/4	5.5	154.0		5.9		2090	3690
	Middle			1-3/4	2-1/2	5.2	154.1		5.7		2090	3615
	Rear			1-1/4	2-1/2	5.3	153.3		5.8		2085	3685
29	Front	50	North	1-1/4	2-3/4	5.0	154.5		6.5		2325	3790
	Middle			3/4	1-5/8	5.3	153.1		5.3		1990	3360
	Rear			5/8	1-1/4	4.8	153.3		5.3		2015	3465

*Average of 2 tests
**Average of 3 2"x2" cubes

ClibPDF - www.fastio.com

TABLE 6
TEST SERIES II
PRODUCTION TESTING

Test No.	Date,	Source Number	Drum North or South	Cement Content Sks/Cy (Titration)**	Compressive Strength, psi** 7-day	8-day	28-day	Flexural Strength, psi*** Days 7	8	9	10	14	15	28
1A	2-15	2		6.0	2620		4920							
B				6.2	2720		4560							
2A	2-15	2		6.0	2650		4740							
B				5.9	2900		4880							
3A	2-16	2		5.8	3020		4950	551						662
B				5.9	2900		4600							
4A	2-16	2		6.0	2580		4350	590						
B				6.0	2650		4740							
5A	2-16	2		5.9	2760		4460	561						
B				5.8	2720		4030							
6A*	2-17	2	South	5.9	3150		5540	581						
B					3180		5520							
7A	2-17	2	North	5.5	3310		4780	651						
B					3130		4740							
8A*	2-18	2	North	5.9	3040		4780	515			560			
B					3150		4600							
9A	2-18	2	North	5.9	2720		4810	575						
C					3010		5290							
10A	2-18	2	South	6.0	2480		4560	428				600		
C					2880		4270							
11A	2-18	2	South	5.7	2690		4780	505				564		
C					3010		4670							
12A*	2-21	3		5.9	2120		3820	204					551	
C*				5.8	1980		3400							
13A	2-21	3		6.1	2460		4160	459			520			
C				6.1	2440		4070							
14A	2-21	3		6.4	2510		3960	510			510			
C				6.1	2640		3910							
15A*	2-22	3		6.0	2850		3780	525			541			
C*				6.0	2580		3840							
16A	2-22	3		6.1				401						
C				6.2				408						

*Control **Average of 2 tests ***Single test values

ClibPDF - www.fastio.com

TABLE 6 - PRODUCTION TESTING, TEST SERIES II (Continued)

Test No.	Date,	Source Number	Drum North or South	Cement Content Sks/Cy (Titration)	Compressive Strength, psi 7-day	8-day	28-day	Flexural Strength, psi Days 7	8	9	10	14	15	28
18A	2-23	3		6.1		3010	5160				478			
C				6.1		2830	4600							
19A	2-23	3		6.0	2950		4490	506						
				6.1	2900		4320							
20A	2-23	3		5.9	2070			560						
C				6.0	1840									
21A	2-25	3		6.0	2830			533						
C				6.0	2440									
22A	2-25	3		5.9	2210			551						
C				5.9	1840									
23A	2-28	3		5.9	2670			651						
C				5.9	2480									
24A	2-28	3		6.0	2620			548						
C				5.9	2620									
25A	2-28	3		5.9		3010		527						
C				5.9		2530								
26A	2-29	3		5.9	2550			530						
C				5.9	2580									
27A	2-29	3		6.0	3360					554				
C				6.0	3330									
28A	3-1	3		5.9	2690			546						
C				5.9	2440									
29A	3-2	3		6.0	2560			468						
C				6.0	2970									
30A	3-2	3		5.9	2440									
C				5.9	2480									
31A	3-2	3		6.0	2410									
C				6.0	2990									

DISCUSSION

In Test Series I, three sets of strength data were obtained because of the desirability of relating the effect of cement imbalance on strength. Variations in other properties, as determined by any of the tests on the plastic concrete may also have a significant effect on strength. The effects of the measured variations may be cumulative or offsetting from batch to batch making any statistical analysis relating cement content and strength invalid. To further complicate matters the source of coarse aggregate was changed several times with different combinations of the two primary sizes being used.

A plot of the cement content variation within a batch of concrete as determined by the titration test, and the associated differential in strength is shown in Figure I. It is seen that in spite of the variables affecting strength as mentioned above, a reasonably good relationship exists.

It has been well established that to obtain uniformly mixed concrete from central-mix plants, operating on short mixing time (50 seconds) proportionate blending of ingredients as they are charged into the mixer is essential. Under ideal batching conditions, acceptably uniform concrete can be obtained with as little as 30 seconds of mixing. With gross imbalances of any of the ingredients in the charging sequence, it is virtually impossible to correct the condition by any reasonable amount of extra mixing. The effects on concrete quality are most extreme when cement or water receive the charging imbalance.

Criteria for mixing efficiency as defined in the California Standard Specifications are:

ClibPDF - www.fastio.com

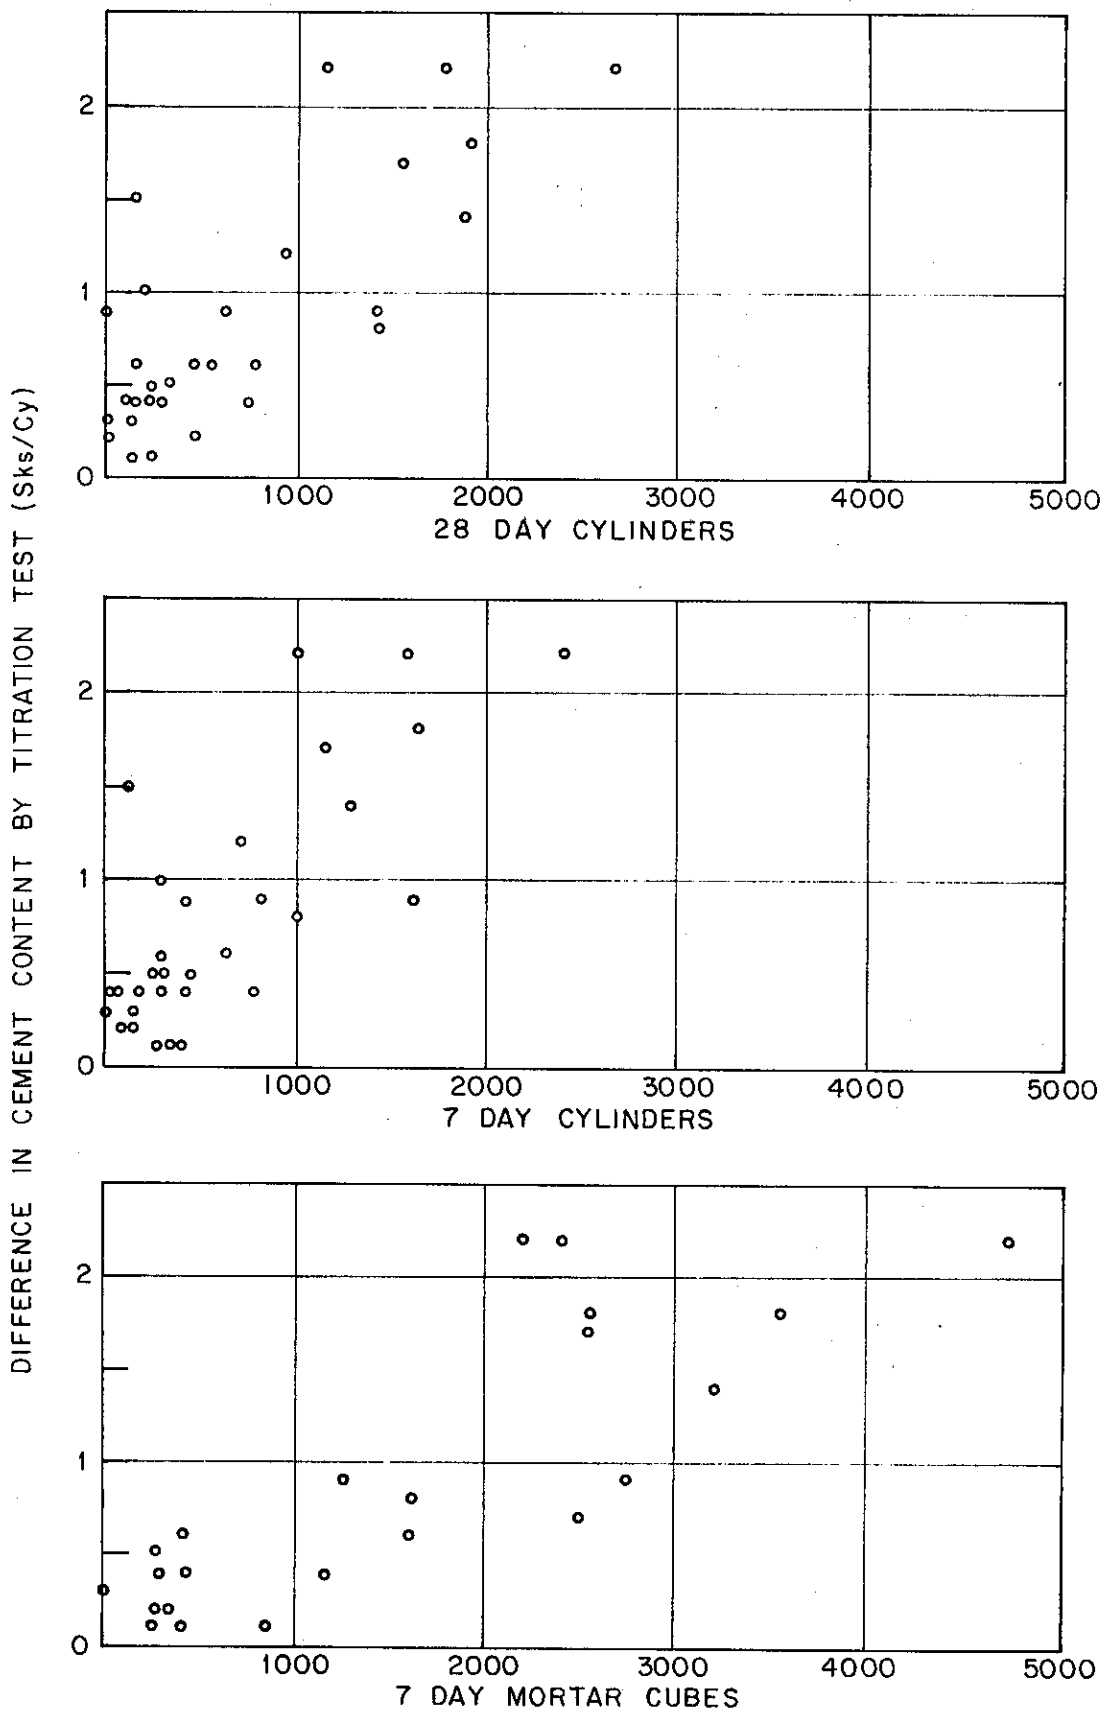

Figure I. EFFECT OF CEMENT VARIATION ON STRENGTH WITHIN BATCH

ClibPDF - www.fastio.com

"The difference in penetration, determined by comparing penetration tests on two samples of mixed concrete from the same batch or truck mixer load, shall not exceed 1/2-inch. Variation in the proportion of coarse aggregates will be determined from the results of tests for 2 samples of mixed concrete from the same truck mixer load and the difference between the 2 results shall not exceed 6 pounds per cubic foot."

Other parameters can be used for concrete uniformity although no generally accepted limits have been established. An AASHTO-ARBA Joint Committee recommends the following:

	Permissible Range Within Batch from 3 Samples (Not to be exceeded in 6 of 7 batches)	
Test	Plant	Roadway
Slump, Inches	2.25	1.75
Air Content, %	2.0	1.5
Weight per Cu. Ft.	4.0	5.5
Coarse Aggregate per Cu. Ft., %	11.0	9.0
28-day Compressive Str. % (Avg. of 2 cyls. per Sample, as % of 3 sample average)	25	20

One reason distribution of cement has not been used as a measure of mixing efficiency is the lack of a suitable test method to determine the cement content of fresh concrete. Results cited above indicates that the titration test can fill this need. In fact, it appears that a good measure of cement distribution may be the most important parameter in evaluating mixer efficiency, and a better indicator of mix uniformity than the measures commonly used. (i.e.: weight per cubic foot, weight of coarse aggregate per cubic foot, slump or penetration, unit weight of air free mortar.)

ClibPDF - www.fastio.com

SUMMARY

The titration test, using the constant neutralization method and under controlled conditions, is considered adequate to determine cement content of fresh concrete to within 1/4-sack per cubic yard. Field trials indicate the test is especially valuable in determining mixer efficiency. By checking different portions of a batch, aggregate and cement feed gates can be set and cycle times adjusted to provide proper mixing. Even after such adjustments, the results indicated between-and within-batch variations although these were not always verified by strength tests.

The cement content can be determined by the titration test in less than 2 hours after concrete is mixed. The test requires 1 hour after preparation of specimens. For control and routine field testing, three titration specimens are prepared and tested from each concrete sample. For mixer performance testing, only 2 specimens are prepared for each sample but since 3 locations in the mixer are sampled, there are 6 specimens to titrate at one time. This can readily be handled by one operator after brief practice. An experienced operator has been observed doing titrations on 9 containers at one time, but this is not recommended.

ClibPDF - www.fastio.com

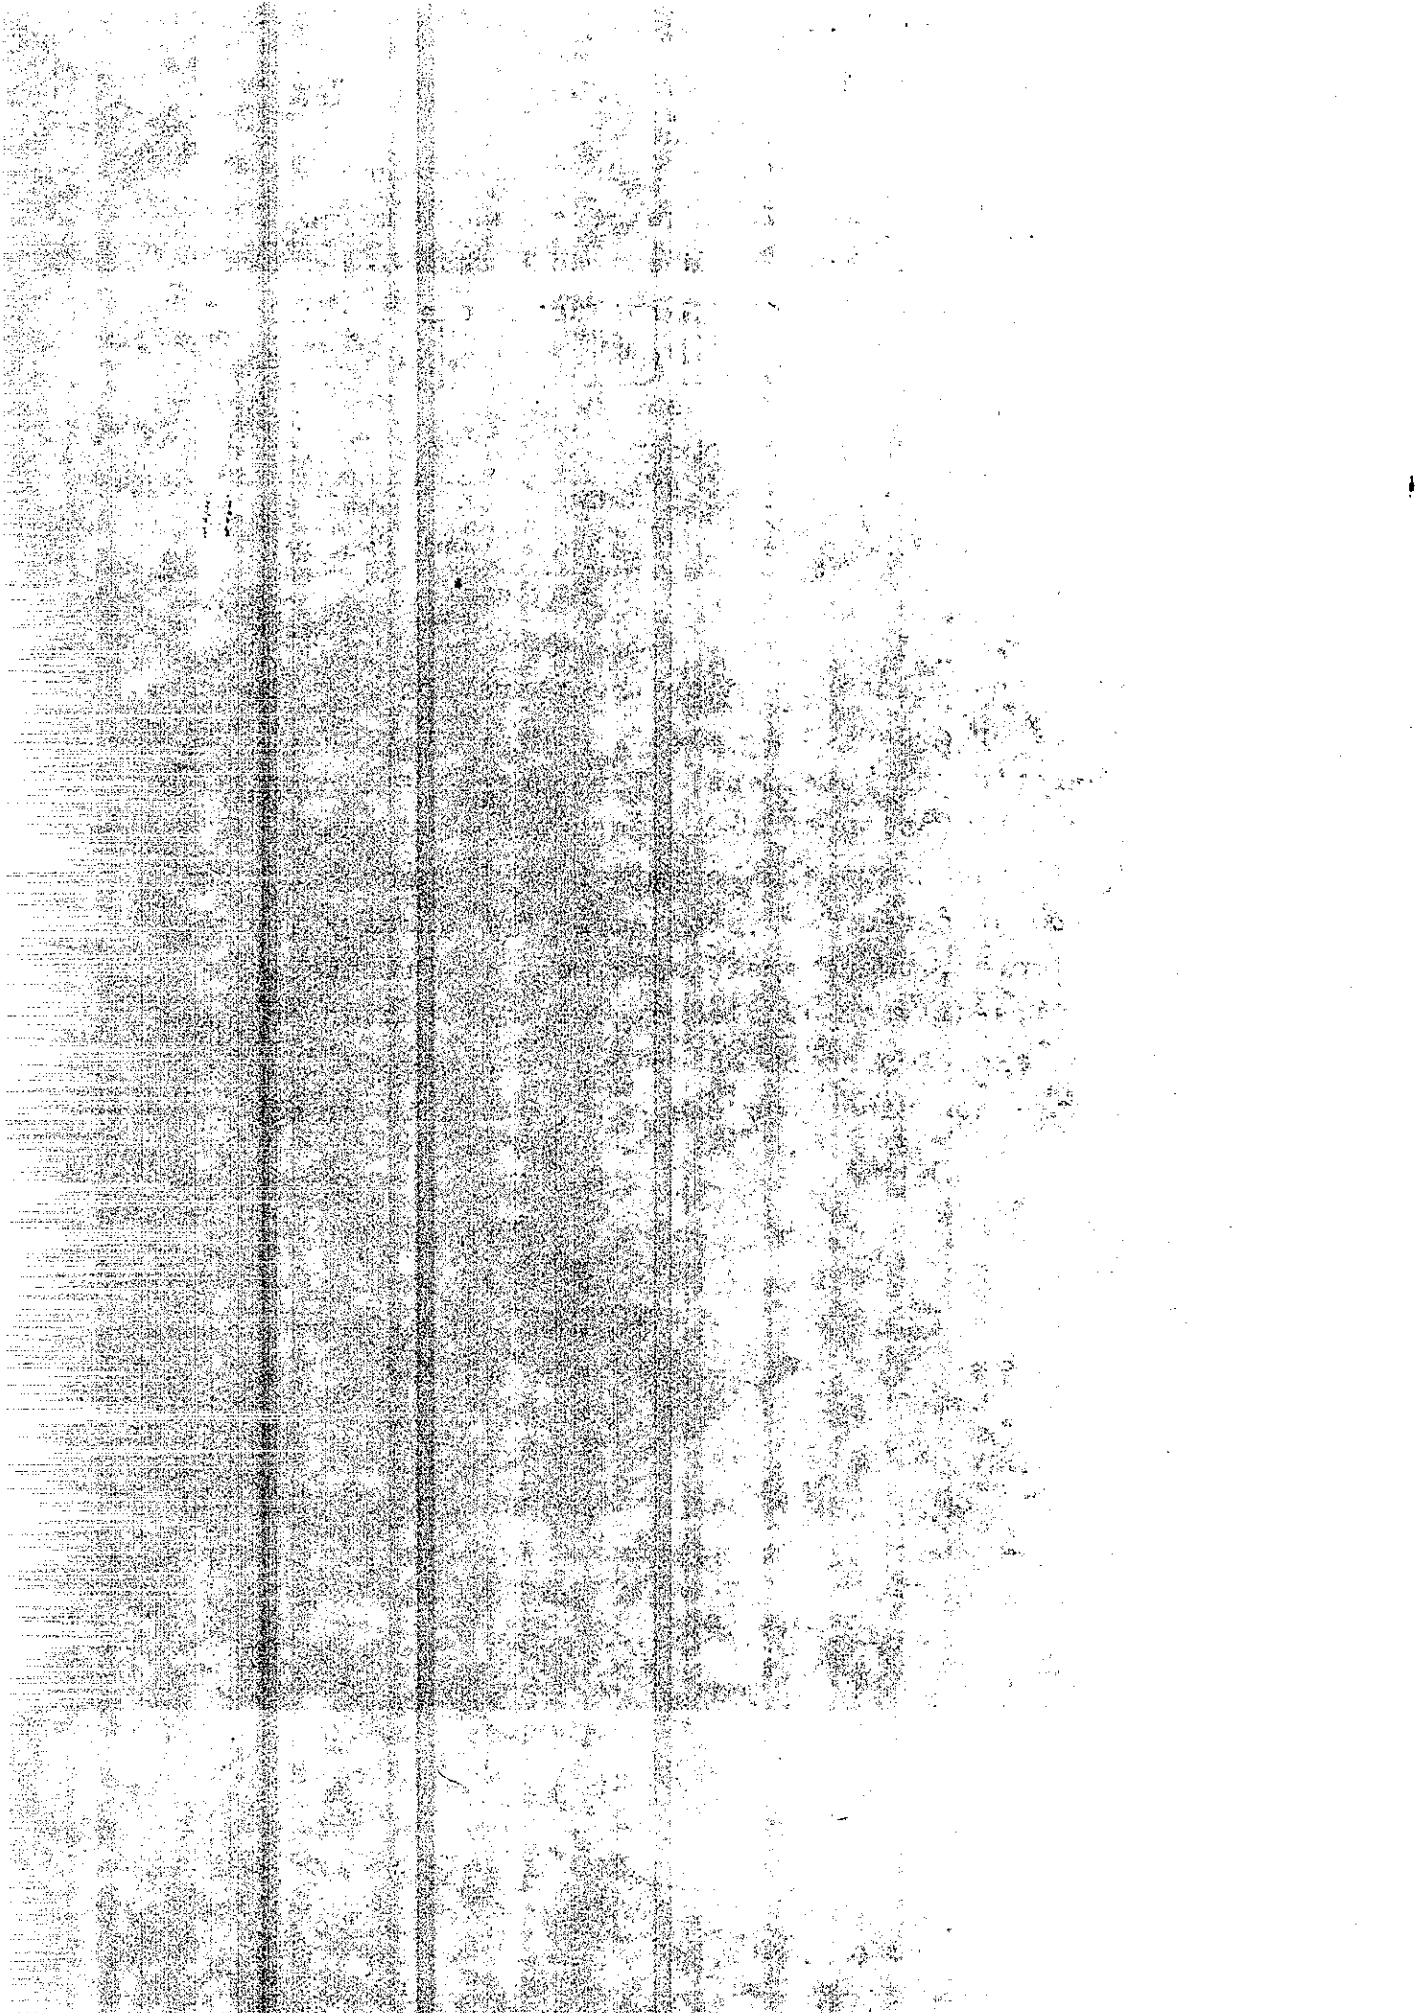

ClibPDF - www.fastio.com

APPENDIX A

DETERMINATION OF CEMENT CONTENT OF FRESH CONCRETE BY CONSTANT NEUTRALIZATION

SCOPE

This method describes a test for determining the cement content of fresh concrete. The determinations are based upon the constant neutralization by three normal hydrochloric acid of an aqueous solution of concrete mortar and water. This is accomplished by adding sufficient acid to just neutralize the hydroxide ions in the cement. When the aggregate is "neutral" or nonreactive, the amount of acid used is directly proportional to the cement content of the fresh concrete sample.

This method is divided into the following parts:

I. Titration Procedure

II. Determination of Calibration Curve

III. Relative Variation of Cement Content Within a Batch

Part I. Titration Procedure

PROCEDURE

A. Apparatus

1. 1 - 100 ml titrating burette or other device permitting slow, easily controlled addition of acid.

2. 1 - burette stand and burette clamp.

ClibPDF - www.fastio.com

3. 1 - 5-gallon plastic "carboy" (to contain the 3N acid solution) equipped with siphon, neoprene or tygon tubing, hose clamps, etc., for connection to the titrating burette.

4. 9 - 2-quart wide mouth polyethylene containers with handles and flat bottoms.

5. Graduated eye dropper or 10 ml graduated cylinder.

6. 6 stainless steel stirring rods.

7. No. 4 sieve, 12-inch diameter.

8. Balance or scale with 5 kg capacity, graduated to 1.0 gm.

9. Glass or polyethylene bottle for burette overflow.

10. 1 - 1000 ml graduated cylinder.

11. 6 - 250 ml Erlenmeyer flasks or polypropylene, three-way pour, disposable beakers.

12. Timer, graduated in 1 second intervals for a total of 1 hour.

B. Reagents

1. Hydrochloric Acid (approximately 3N). Pour the contents of two full standard 6-lb bottles of concentrated hydrochloric acid C.P. into the 5-gallon polyethelene carboy. Add tap water in 1-gallon increments until 5 gallons of solution is obtained. After each addition of water, shake the carboy vigorously for about one minute to obtain a homogeneous mixture. It is important to agitate this solution before starting each test series to maintain the homogeneous mixture.

ClibPDF - www.fastio.com

Note: When mixing the acid solution, always wear chemical protective gloves, goggles, and aprons. DO NOT use compressed air to agitate the solution in the carboy. DO NOT breathe acid fumes.

2. Phenolphthalein Indication Solution (1% solution). Dissolve 5 grams of phenolphthalein powder USP in 250 mls of ethanol. Dilute with 250 mls of distilled water.

C. Test Record Form

Record test data on "Field Laboratory Record of Constant Neutralization Tests", Form No. HMR T-597.

D. Test Procedure

1. Secure approximately 5 kg of a representative sample of fresh concrete and screen over a No. 4 sieve into a clean pan. The screen and pan should be dampened but excess water must be removed before screening. Screen as much of the mortar from the coarse aggregate as possible. Place the mortar in a covered container immediately after the screening operation. The screened mortar must remain covered and set no longer than 30 minutes before the addition of the 1000 mls of tap water. Testing should begin 45 minutes ±15 minutes after mixing.

2. Prepare test specimens by weighing 150 gms ± 1 gm of the screened mortar into the 2-quart containers. Mix the screened mortar sample thoroughly before each sampling. Three specimens are required for each control and field sample and two specimens for each mixer performance test sample.

3. Add 1000 mls of tap water to each specimen and start timer.

ClibPDF - www.fastio.com

4. Using the graduated eye-dropper or 10 ml graduated cylinder, add approximately 4 mls of phenolphthalein solution to each container. Stir for 5-10 seconds. (The solution will turn red due to the presence of cement.)

5. Place one stainless steel rod in each container, weigh, and record the weight of each container and its contents to the nearest 1.0 gm.

6. Fill each of the Erlenmeyer flasks with 60 mls of the 3N hydrochloric acid for initial acid. (The number of prepared flasks needs to equal the number of test specimens.) Acid may be measured out beforehand, but containers should be covered and not be allowed to set for more than one hour.

7. Ten minutes after the addition of water to the mortar, add 60 mls of acid to each 2-quart container of mortar solution and stir for 15 seconds.

8. At 1-minute intervals, following the addition of the 60 mls of acid, add approximately 5 mls of acid from the titrating burette and stir for 5 seconds. Follow this procedure for each of the containers in turn. Repeat this procedure until the color comes back slowly between additions. At this point the amount of acid being added at the 1-minute intervals should be reduced as necessary to just eliminate the color. (Excess acid may attack the aggregates in the later phases of the test, when the hydration products from the cement remaining in the mixture are low, resulting in an erroneous cement determination.) It is important that the operator exercise great care in maintaining an equally neutral solution in all specimens of a sample by diligently adding the acid necessary at the 1-minute intervals and stirring for 5 seconds.

ClibPDF - www.fastio.com

9. After the 60 minutes have elapsed, reweigh, and record the weight for each container. From the difference between the initial and final gross weights, calculate and record the total weight of hydrochloric acid used to neutralize each of the three solutions (see Figure A).

10. The resulting weights of hydrochloric acid can be used to find an "average" cement content of the field test sample with the use of a calibration curve (see Part II), or to determine the variation in cement content for evaluation of mixer efficiency (Part III).

E. Precautions

1. Use extreme caution when handling acid and use protective clothing and equipment. Do not breathe acid fumes.

2. This test cannot be performed by persons who are color blind.

3. Keep all reagent bottles closed when not in use to prevent evaporation and changes in concentration.

4. Rinse and drain sample containers after every test.

5. The 2-quart containers should be inspected periodically for leaks.

ClibPDF - www.fastio.com

PART II. DETERMINATION OF CALIBRATION CURVE

PROCEDURE

A. Apparatus

1. Concrete Mixer. A revolving pan or revolving paddle mixer capable of thoroughly mixing batches of the prescribed size at the required slump.

2. Unit Weight Measure. A cylindrical watertight steel measure having a nominal capacity of 1/2 cubic foot, provided with handles. (See Test Method No. Calif. 518.)

3. Penetration or Slump Measure. (See Test Method No. Calif. 533 or ASTM Designation C143.)

4. US No. 4 sieve, brass, full height, 12 inches in diameter, for sieving fresh concrete. A rigid type extension and handles may be attached to facilitate handling and prevent spillage.

B. Test Procedure

1. Central mix plant method - optional.

a. Prior arrangements with the contractor will be needed for mixing a batch 300 seconds, and it will be necessary to have an inspector to accurately record the scale weights for the 300-second batch.

b. After the batch has mixed 300 seconds and discharged into a truck, take penetration measurements and secure samples at approximately one-third the distance from each end

ClibPDF - www.fastio.com

of the truck keeping the two samples separate. The size of each sample should be sufficient to fill a 1/2-cubic foot unit weight bucket.

Note: If the penetrations are not within contract specifications, the batch should not be tested.

c. After the completion of the unit weight tests on the two samples, proceed as described in Part I, D, of this test method. Precaution: Be sure samples are properly identified.

d. Using the scale weights and an average of the two unit weights, compute the cement content for the batch in accordance with Test Method No. Calif. 518.

Note: Control batch should be mixed midway through the work day if only one control batch is mixed.

2. Laboratory Mix Method - Referee

a. Secure a sufficient quantity of sand, aggregate, cement, and admixture for three batches of at least 1.0 cubic foot each, and batch in the proportions of the mix being investigated. Batching of the water and admixture, if used, should be done immediately prior to mixing.

b. Mix the concrete in accordance with accepted laboratory procedures (Test Method No. Calif. 530, Section C).

c. Measure the slump of the concrete immediately after mixing in accordance with ASTM Designation: C143. When removing material from the mixer, use care to obtain a representative sample.

Note: Lab test mixes are usually not of sufficient volume to permit determination of ball penetration.

ClibPDF - www.fastio.com

d. Measure the unit weight and calculate the cement factor in accordance with Test Method No. Calif. 518.

e. Return the material used for slump and unit weight tests to the mixing pan and remix for 1 minute.

f. Proceed as described in Part I, D, of this test method.

C. Determination of a Calibration Curve

1. The calibration curve, for a particular mix design, establishes the relationship between the amount of hydrochloric acid used and the cement content.

2. Using the graph provided on Form HMR T-597, plot the average grams of acid used versus cement content as determined by Test Method No. Calif. 518. Draw a straight line from the origin of the chart to the plotted point.

3. To determine the cement content of a field sample, follow the procedure as described in Part I, D. Mark the average amount of acid used to titrate the sample on the ordinate of the chart, move horizontally until crossing the calibration curve, then vertically down and read the cement content on the abscissa.

4. In the event of any change in source of aggregate, cement, or working solution of acid, a new calibration curve must be established. Ordinarily, a new calibration curve should be established each day. On long projects, with no changes taking place, every other day should be sufficient.

5. Each operator must establish his own calibration curve.

ClibPDF - www.fastio.com

PART III. DETERMINATION OF RELATIVE VARIATION OF CEMENT CONTENT WITHIN A BATCH.

A. Test Procedure

1. Obtain samples as describe in Part II, B, 1, of this test method except that the scale weights are not necessary and the normal mixing time shall be used.

2. Perform the test procedure described in Part I, utilizing two specimens of mortar from each screened sample.

3. Record results on Form HMR T-597.

B. Calculations

1. Determine the average number of grams of acid required to neutralize all specimens.

Note: If several batches are tested, the average should include all tests.

2. Plot on the graph, the average number of grams of acid versus the design cement content of the batch.

3. Draw a line from the origin through the plotted point.

4. Plot the average grams of acid of each pair of duplicate specimens along the indicated line.

5. Read on the abscissa of graph, the indicated cement content for each sample to determine range (see Figure B).

ClibPDF - www.fastio.com

ClibPDF - www.fastio.com

STATE OF CALIFORNIA — DIVSION OF HIGHWAYS

MATERIALS AND RESEARCH DEPARTMENT

FIELD-LABORATORY RECORD OF

CONSTANT NEUTRALIZATION TESTS

FOR CEMENT CONTENT DETERMINATION OF FRESH CONCRETE

Sheet / of / Sheets			Date 12-31-71	
Operator JOHN L. MC CORMICK				
Dist. 07	Co.	Rte	P.M.	
SOURCE	CHARGE	EXPENDITURE AUTHORIZATION	SPECIAL DESIGNATION USE WHEN APPLICABLE	OBJECT
Source of Aggregate		Cement Brand		

Station	Jar No.	Gross Jar Wt. Grams. Start	Gross Jar Wt. Grams. Final	HCl Gms.	Avg. HCl Gms.	Cement Content
	1	1413	1572	159		
CONTROL #1	2	1406	1558	152	154.7	5.90
	3	1406	1559	153		
	4	1403	1558	155		
CONTROL #2	5	1399	1554	155	155.7	6.10
	6	1406	1563	157		
	7	1406	1559	153		
CONTROL #3	8	1399	1554	155	154.0	6.0
	9	1413	1567	154		
		AVERAGE			154.8	6.0

HMR T-597 (Orig 12-71)

CALIBRATION CURVE

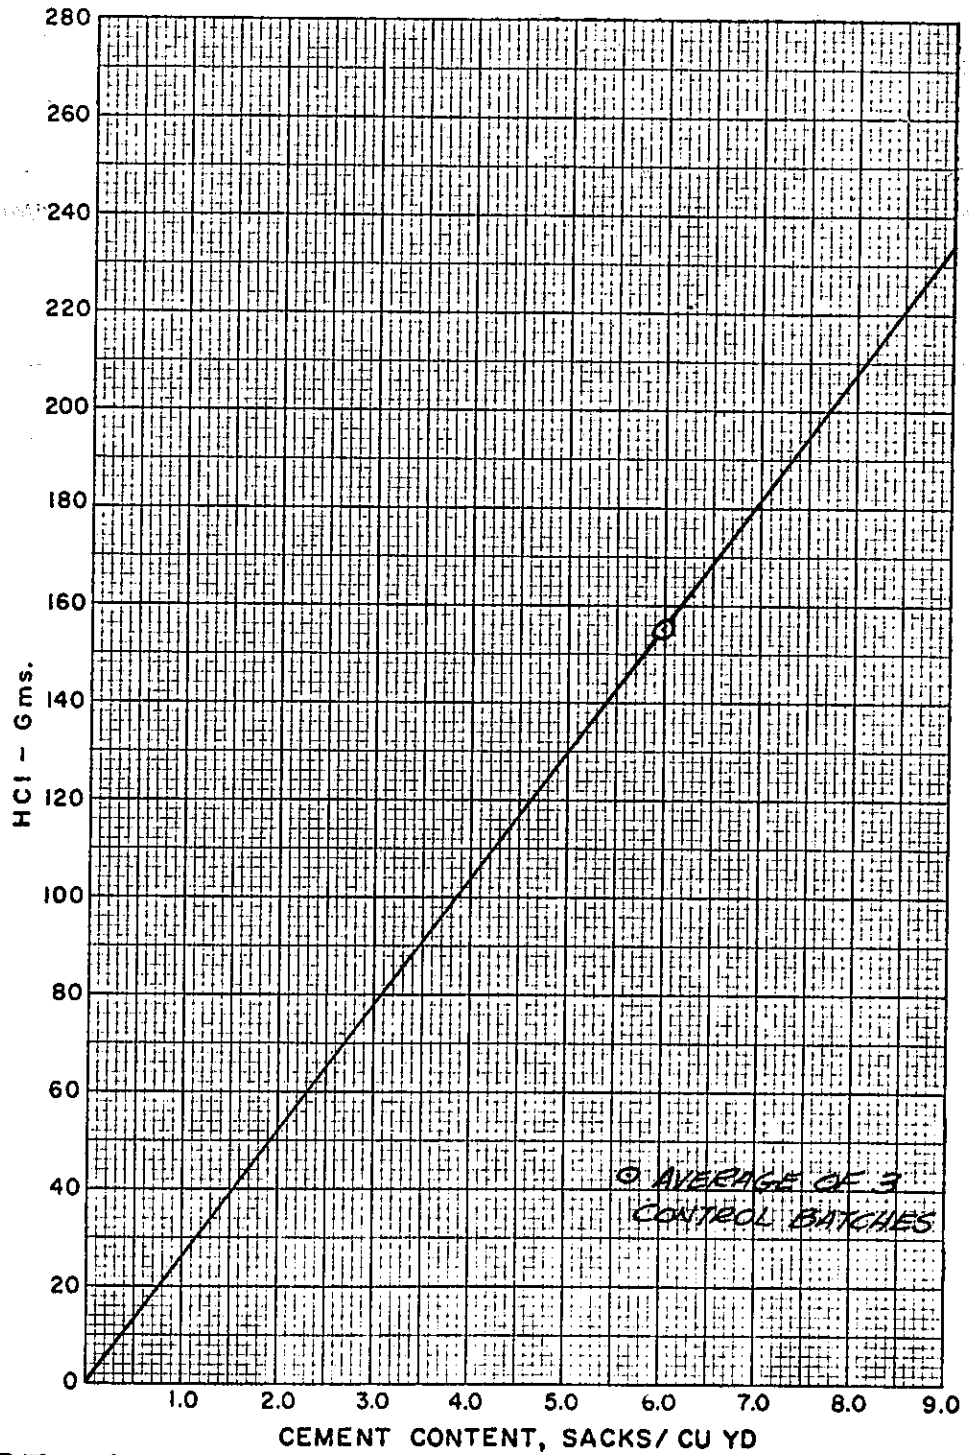

FIGURE A

ClibPDF - www.fastio.com

STATE OF CALIFORNIA — DIVSION OF HIGHWAYS

MATERIALS AND RESEARCH DEPARTMENT

FIELD-LABORATORY RECORD OF

CONSTANT NEUTRALIZATION TESTS

FOR CEMENT CONTENT DETERMINATION OF FRESH CONCRETE

Sheet 1 of 1 Sheets				Date 1-16-72
Operator JOHN L. McCORMICK				
Dist. 07	Co.	Rte	P.M.	
SOURCE	CHARGE	EXPENDITURE AUTHORIZATION	SPECIAL DESIGNATION USE WHEN APPLICABLE	OBJECT
Source of Aggregate			Cement Brand	

Station	Jar No.	Gross Jar Wt. Grams. Start	Gross Jar Wt. Grams. Final	HCl Gms.	Avg. HCl Gms.	Cement Content
9A	10	1403	1563	160	160.5	
	NN	1399	1560	161		
9B	3	1400	1553	153	154.5	
	31	1393	1549	156		
9C	9	1400	1552	152	151.5	
	30	1400	1551	151		
		TOTAL AVERAGE			155.5	
DESIGN = 6.0 SACK/CU. YD = 155.5						
RANGE OF VARIATION = 5.85 TO 6.25						

HMR T-597 (Orig 12-71)

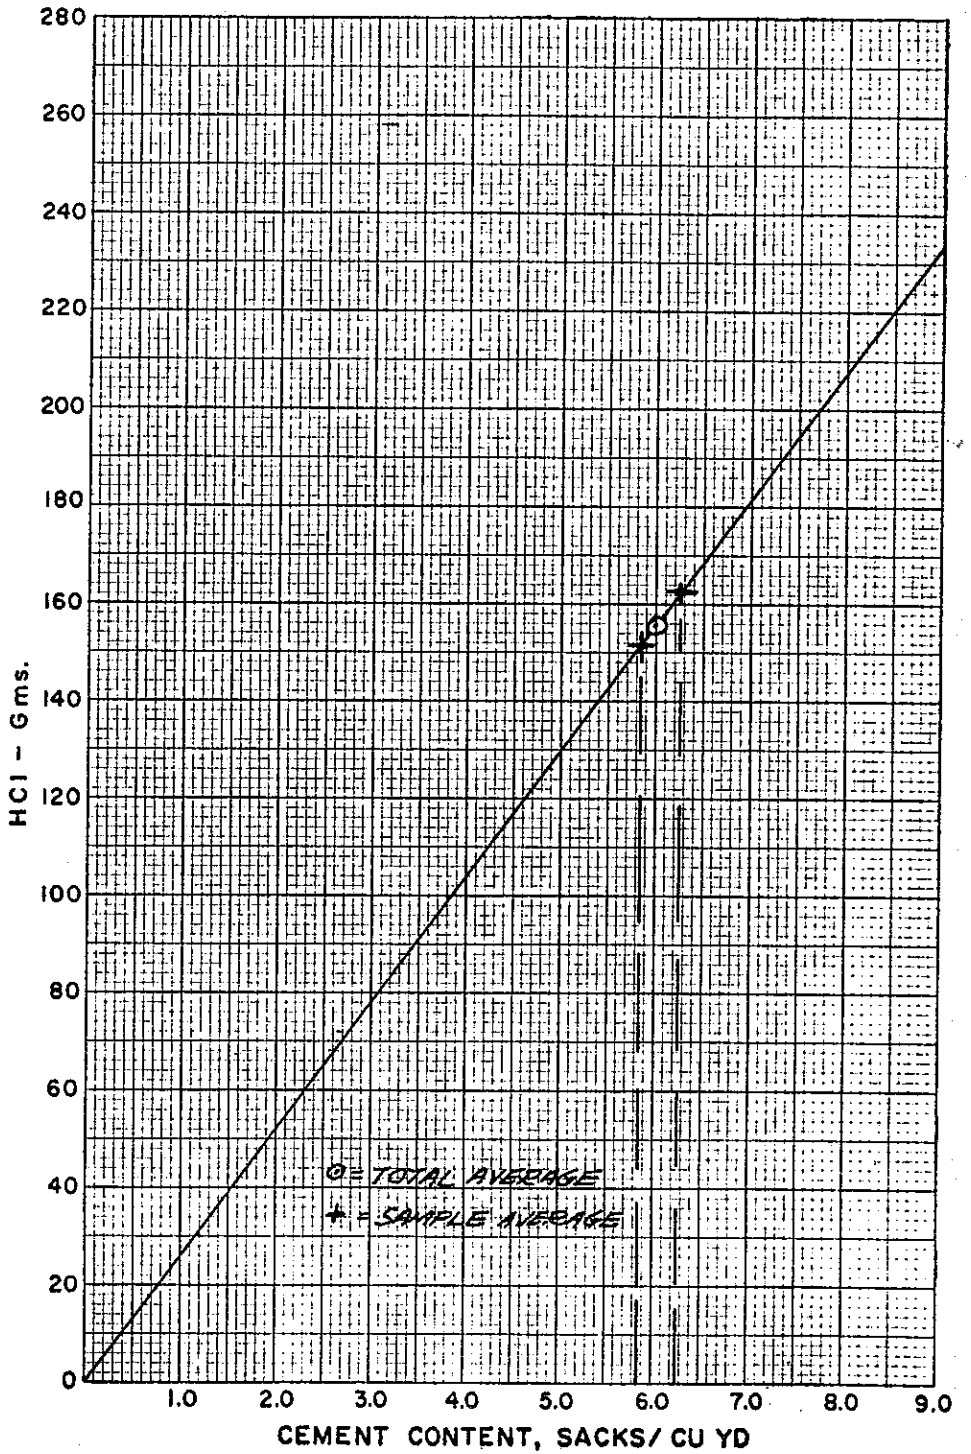

FIGURE B

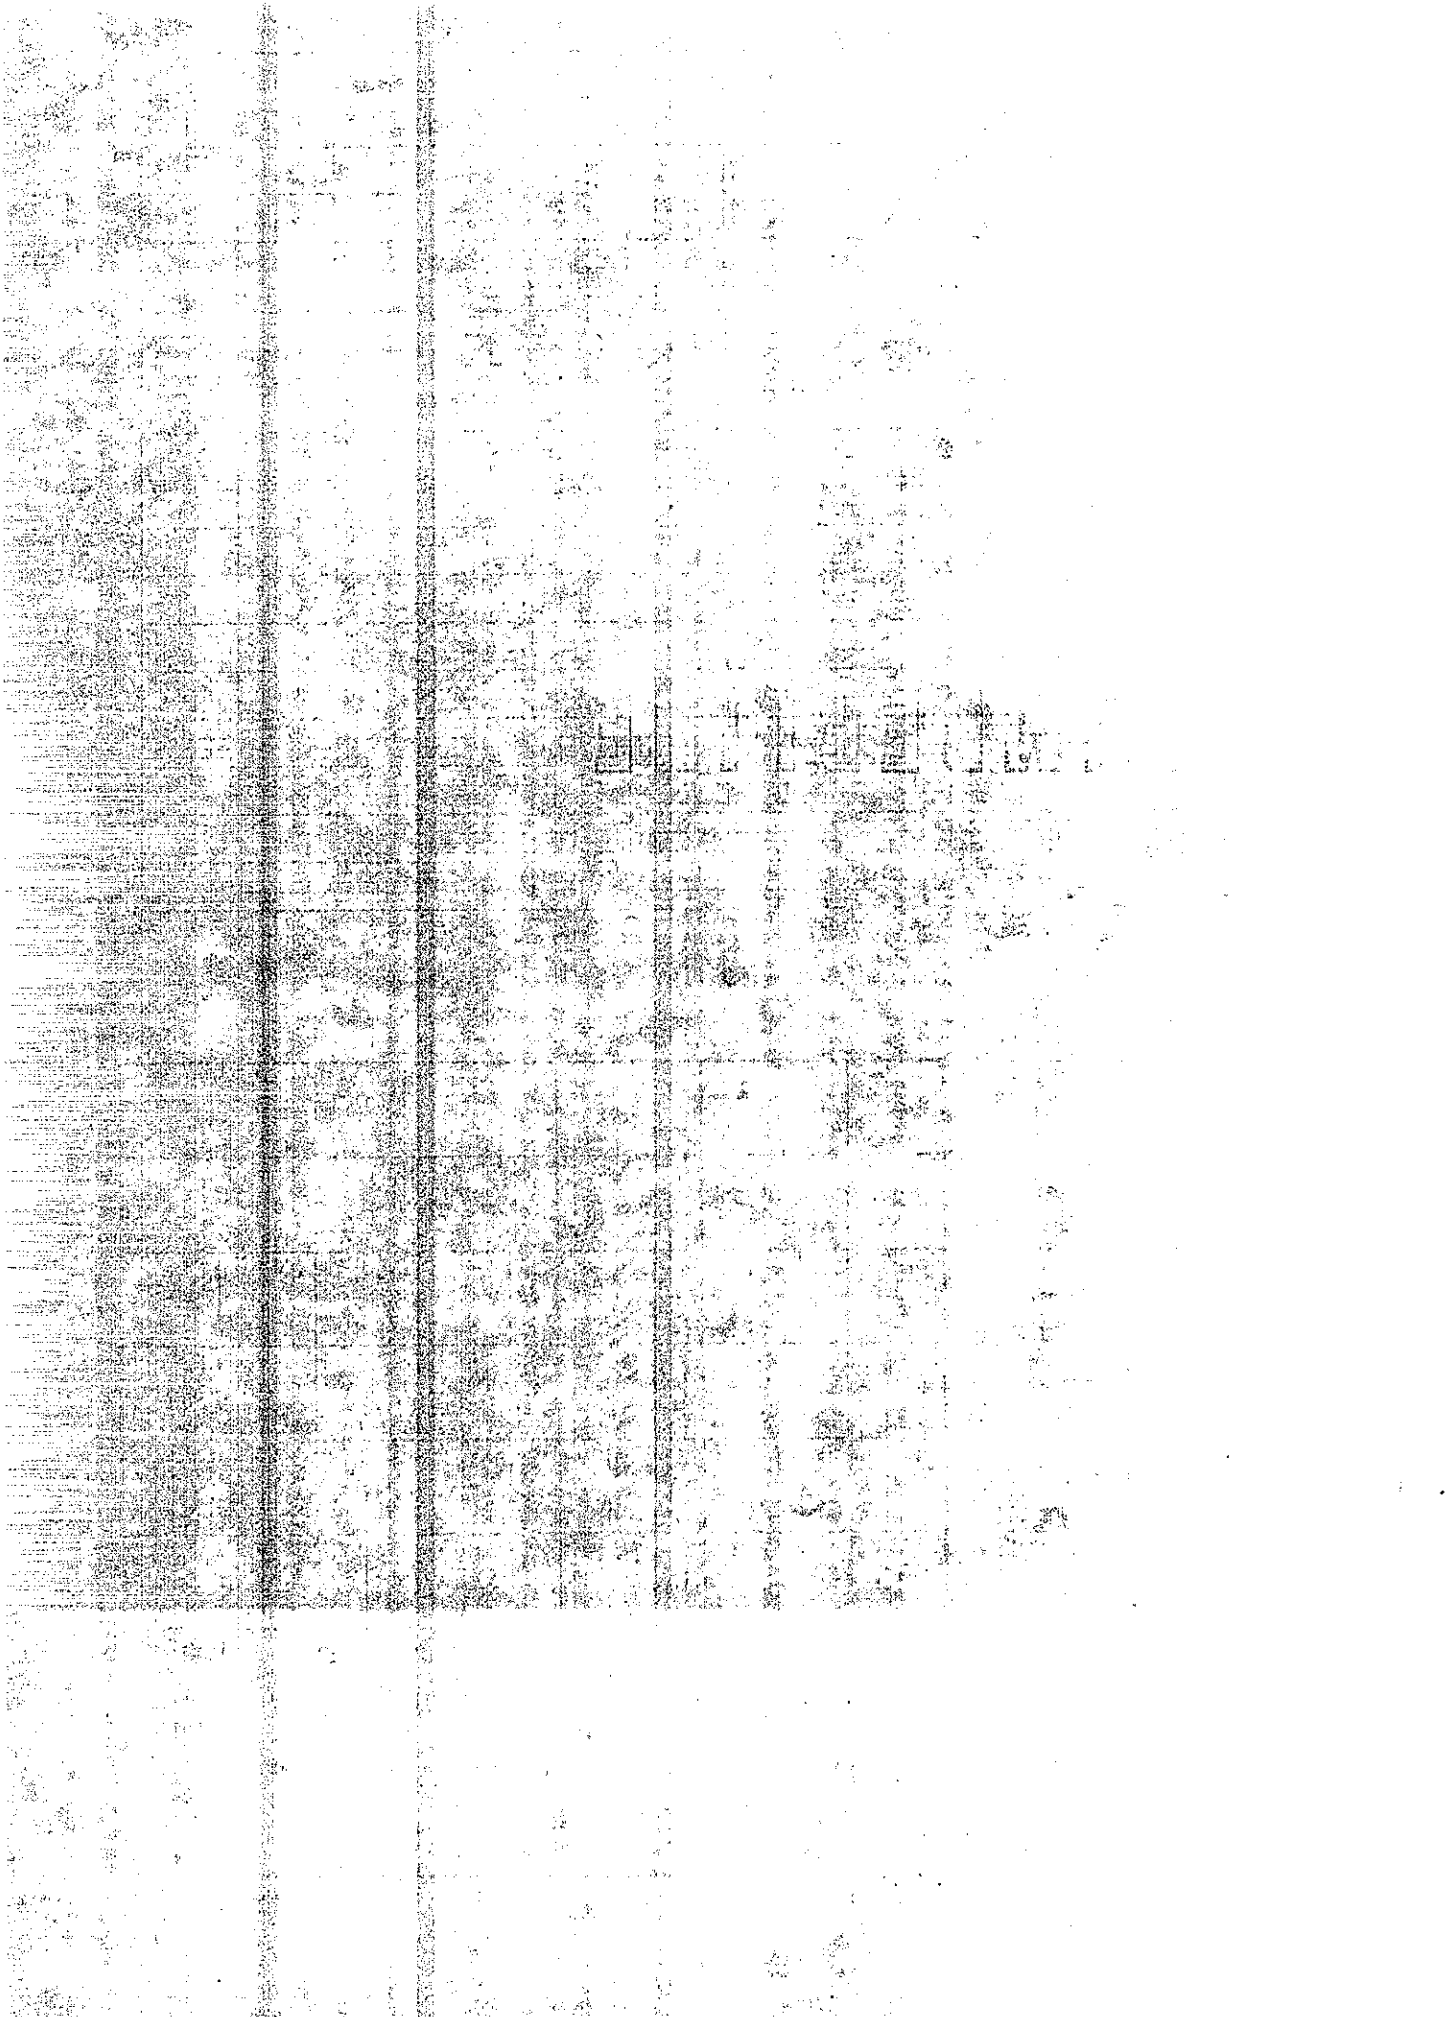

ClibPDF - www.fastio.com

ClibPDF - www.fastio.com

ClibPDF - www.fastio.com